

OAK



Dress Your Home

Pavimento



V2






PEI 4

OAK


Gres Porcellanato
Porcelain stoneware
Grès cérame
Feinsteinzeug

30x120
12"x48"



RETTIFICATO / R9 + R11

20x120
8"x48"



NATURALE / R9 + R11

20x90
8"x35.5"

NATURALE / R9 + R11 Ö

FORMATO Size	SPESSORE Thickness	SCATOLE Boxes			PALETTE Pallets		
		pcs	m ²	kg	box	m ²	kg
30x120 RET	10	4	1,44	28,60	30	43,20	880
20x120 RET	10	6	1,44	28,60	36	51,84	1050
20x90 NAT	9	6	1,10	20,20	60	66,00	1212
20x90 GRIP	9	6	1,10	20,20	60	66,00	1212

Imballi / Pesì
[Packaging / Weights]





↑ OAK RED



↑ OAK DARK



30X120
20X120

Oak

Gres Porcellanato / Porcelain stoneware / Grès cérame / Feinsteinzeug

10 mm
RETTIFICATO

30X120
20X120

Blonde

IOKP210C Oak BLONDE / 30x120 ■ 83



IOKP200C Oak BLONDE / 20x120 ■ 83
IOKP220 Oak BLONDE / Grip R11 / 20x120 ■ 83

Natural


IOKP310C Oak NATURAL / 30x120 ■ 83



IOKP300C Oak NATURAL / 20x120 ■ 83
IOKP320 Oak NATURAL / Grip R11 / 20x120 ■ 83

Red

IOKP510C Oak RED / 30x120 ■ 83

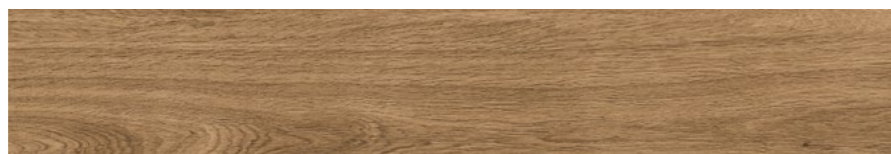

IOKP500C Oak RED / 20x120 ■ 83

Dark

IOKP410C Oak DARK / 30x120 ■ 83



IOKP400C Oak DARK / 20x120 ■ 83

White

IOKP110C Oak WHITE / 30x120 ■ 83




IOKP100C Oak WHITE / 20x120 ■ 83

Consigli di posa / Conseils de pose / Verlegeempfehlungen


Installation advise

NO 50%



Mix solution: 30x120 / 20x120


OK




Mix solution: 30x120 (60%) / 20x120 (40%)

Pezzi Speciali
[Special items]

 ■ 121
Gradino Costa Retta
30x120 / 12"x48"

 ■ 129
Angolare Dx / SX
30x120 / 12"x48"

 ■ 24
Battiscopa
6,5x120
pcs/box 8
Kg 15
IOKB201 White
IOKB202 Blonde
IOKB203 Natural
IOKB204 Red
IOKB205 Dark

20X90

Oak

Gres Porcellanato / Porcelain stoneware / Grès cérame / Feinsteinzeug

▼
9 mm
▲
NATURALE

Blonde



20x90 BLONDE
IOKP02 / NAT / R9 █ 65
IOKP08 / GRIP / R11 █ 65

Natural



20x90 NATURAL
IOKP03 / NAT / R9 █ 65
IDEP06 / GRIP / R11 █ 65

Red



20x90 RED
IOKP04 / NAT / R9 █ 65

White




20x90 RHITE
IOKP01 / NAT / R9 █ 65

Dark




20x90 DARK
IOKP05 / NAT / R9 █ 65
IDEP07 / GRIP / R11 █ 65

Pezzi Speciali
[Special items]




█ 116

Gradino Costa Retta
20x90



█ 121

Angolare Dx / SX
20x90



█ 9

Battiscopa
5x45
pcs/box 30
IOKB01 White
IOKB02 Blonde
IOKB03 Natural
IOKB04 Red
IOKB05 Dark



CARATTERISTICHE TECNICHE

Technical features
Caractéristiques techniques
Technische Eigenschaften

	Metodo di prova Testing method Méthode d'essai Prüfmethode	Valori prescritti International Standard Internationale Normwerte Valeurs Prescrites	Valori prescritti International Standard Internationale Normwerte Valeurs Prescrites	Valori medi Average Value Mittelwert Valeurs Moyennes
Assorbimento d'acqua Water absorption Absorption d'eau Wasseraufnahme	ISO 10545 - 3	≤ 0,5 %	> 10 %	Conforme In accordance Entsprechend
Lunghezza e larghezza Length and width Longueur et largeur Länge und Breite	ISO 10545 - 2	+/- 0,6 %	+/- 0,5 %	Conforme In accordance Entsprechend
Spessore Thickness Épaisseur Stärke	ISO 10545 - 2	+/- 5 %	+/- 10 %	Conforme In accordance Entsprechend
Rettilineità degli spigoli Straightness Équerage des angles Geradlinigkeit	ISO 10545 - 2	+/- 0,5 %	+/- 0,3 %	Conforme In accordance Entsprechend
Ortogonalità Rectangularity Orthogonalité Rechtwinkligkeit	ISO 10545 - 2	+/- 0,6 %	+/- 0,5 %	Conforme In accordance Entsprechend
Planarità Warpage Planéité Ebenflächigkeit	ISO 10545 - 2	+/- 0,5 %	+/- 0,5 % - 0,3%	Conforme In accordance Entsprechend
Coefficiente di attrito (scivolosità) Friction coefficient (slipperiness) Coefficient de friction (glissement) Reibungskoeffizient (Schlupfrigkeit)				
Coefficiente dilatazione termica lineare Coefficient of linear thermal-expansion Coefficient de dilatation thermique linéaire Lineare Wärmeausdehnung	ISO 10545 - 8	9 MK ¹		7 MK¹
Resistenza alla flessione Flexion resistance Résistance à la flexion Biegezugfestigkeit	ISO 10545 - 4	> 35 N/mm ²	> 15 N/mm ²	Conforme In accordance Entsprechend
Resistenza all'abrasione profonda Deep abrasion resistance Résistance à l'abrasion profonde Beständigkeit gegen Tiefenabrieb				
Resistenza al gelo Frost resistance Résistance au gel Frostwiderstandsfähigkeit	ISO 10545 - 12	Nessuna alterazione No alteration		Conforme In accordance Entsprechend
Resistenza agli sbalzi termici Thermal shock resistance Résistance aux écarts de température Temperaturwechselbeständigkeit	ISO 10545 - 9	Nessuna alterazione No alteration		Conforme In accordance Entsprechend
Resistenza dei colori alla luce Color resistance to light Résistance de la couleur à la lumière Lichtbeständigkeit	DIN 51094	Nessuna alterazione No alteration		Conforme In accordance Entsprechend
Resistenza ai prodotti chimici Chemical resistance Résistance aux produits chimiques Chemikalienfestigkeit	ISO 10545 - 13	Classe UB min	Classe GB min	Conforme In accordance Entsprechend
Resistenza alle macchie Stain resistance Résistance aux taches Flecken-Beständigkeit	ISO 10545 - 14	Classe 3 min	Classe 3 min	Conforme In accordance Entsprechend

UNI EN 14411 G
Gruppo BIa GL

Pavimenti in gres porcellanato
Porcelain wall and floor tiles

UNI EN 14411 L
Gruppo BIII GL

Rivestimenti in bicottura
Double firing wall tiles



Azienda
Company



idea ceramica // by MoMa ceramiche Group



Finale Emila (MO) - Via Panaria Bassa 17/A - Italy

Tel. +39 0535 90401 / info@ideaceramica.biz

www.ideaceramica.net

A detailed botanical illustration of various tropical plants, including large palm-like leaves with prominent veins and clusters of small, light-colored flowers. The style is reminiscent of a scientific or artistic study, with fine lines and a muted color palette of greens, browns, and greys.

idea ceramica

Via Panaria Bassa 17/A
41034 Finale Emilia (MO)
Tel. +39 0535 90401
Fax. +39 0535 762368

MADE IN ITALY

info@ideaceramica.biz

www.ideaceramica.net